

VITAFLOW 1568 - 1½" EDUCTOR

Materials of Construction

Body & Diffuser Bronze ASTM B 62
 Nozzle Monel or 316 Stainless

GENERAL SPECIFICATIONS

- Suction Lift Up to -20 Feet
- Discharge Head Up to 100 Feet
- Inlet Pressure 50 - 150 PSI
- Inlet Quantity 10 - 40 GPM
- Suction Capacity 12 - 40 GPM


Flanges

150 LB ANSI B16.24 FLAT FACE (standard)
 (also available DIN or JIS or Undrilled)

	<u>Inlet</u>	<u>Suction</u>	<u>Discharge</u>
<u>I.D.</u>	1"	1½"	1½"
<u>O.D.</u>	4¼"	5"	5"
<u>B.C.</u>	3⅞"	3⅞"	3⅞"
<u># Holes</u>	4	4	4
<u>Hole Ø</u>	⅝"	⅝"	⅝"

DIMENSIONS:

<u>Size Inlet</u>	1"
<u>Suction</u>	1½"
<u>Discharge</u>	1½"
<u>"A"</u>	7.75"
<u>"B"</u>	4½"
<u>"C"</u>	2½"
<u>"D"</u>	¾"
<u>Weight</u>	15 lbs

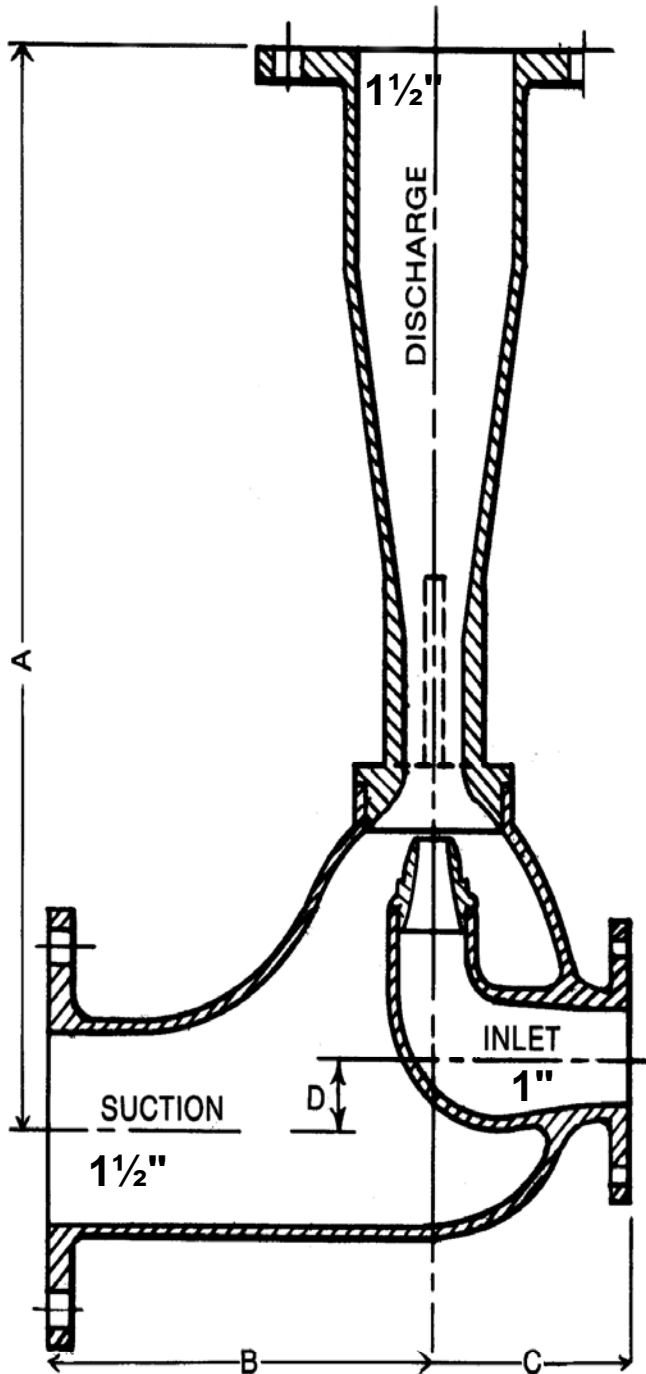

<u>Model</u>	<u>Suct. & Disch.</u>	<u>Inlet</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>
1568-1½"	1½"	1"	7.75"	4½"	2½"	.75"

VITAFLOW, LLC
 576 N. Birdneck Rd, Unit 142,
 Virginia Beach, VA 23451,
 Michael Hume, COO,
 Ph: 904/316-5774, mhume@vitaflow.com

