

# VITAFLOW 1568 - 2" EDUCTOR

## Materials of Construction

Body & Diffuser Bronze ASTM B 62  
Nozzle Monel or 316 Stainless

## GENERAL SPECIFICATIONS

- Suction Lift Up to -20 Feet
- Discharge Head Up to 100 Feet
- Inlet Pressure 50- 150 PSI
- Inlet Quantity 40-80 GPM
- Suction Capacity 35-60 GPM

## Flanges


Standard Flange 150 LB ANSI B16.24 Flat Face  
*also available DIN Metric Flanges*

## Suggested Uses

The V.M. 1568 flanged eductor can be permanently installed for pumping liquids from chain lockers, bilges, cargo spaces or any area that has to be pumped dry.

## Dimensions:

Inlet	1 1/4"
Suction	2"
Discharge	2"
'A'	10"
"B"	6"
"C"	3"
"D"	1"
Weight	21 Lbs

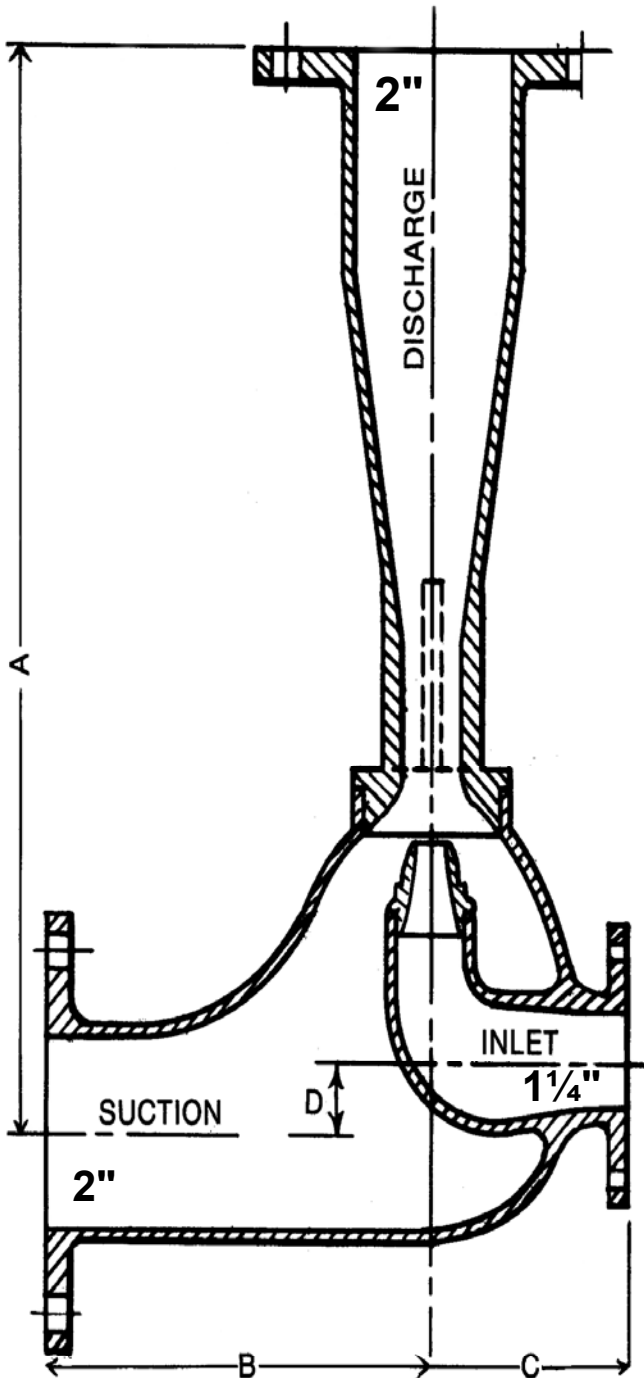

<u>Suct. &amp;</u>						
<u>Model</u>	<u>Disch.</u>	<u>Inlet</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>
1568-2"	2"	1 1/4"	10"	6"	3"	1"

**VITAFLOW, LLC**  
576 N. Birdneck Rd, Unit 142,  
Virginia Beach, VA 23451,  
Michael Hume, COO,  
Ph: 904/316-5774,  
mhume@vitaflow.com

