

VITAFLOW 1568 - 3" L EDUCTOR

Materials of Construction

Body & Diffuser – Bronze ASTM B62
Nozzle - Monel

SPECIFICATIONS

Suction Lift Up to -20 Feet
Discharge Head Up to 110 Feet
Inlet Pressure 50 – 150 PSI
Inlet Quantity 250– 400 GPM
Suction Capacity Up to 350 GPM

Flanges


Standard Flanges 150 LB ANSI B16. 24 FF
(also available with DIN or JIS flanges)

Suggested Uses

The V.F. 1568 flanged eductor can be permanently installed for pumping liquids from chain lockers, bilges, cargo spaces or any area that has to be pumped dry.

Dimensions:

	<u>Inches</u>
Inlet	2"
Suction	3"
Discharge	3"
'A'	22"
"B"	8"
"C"	4"
"D"	1¼"
Weight	58 Lbs

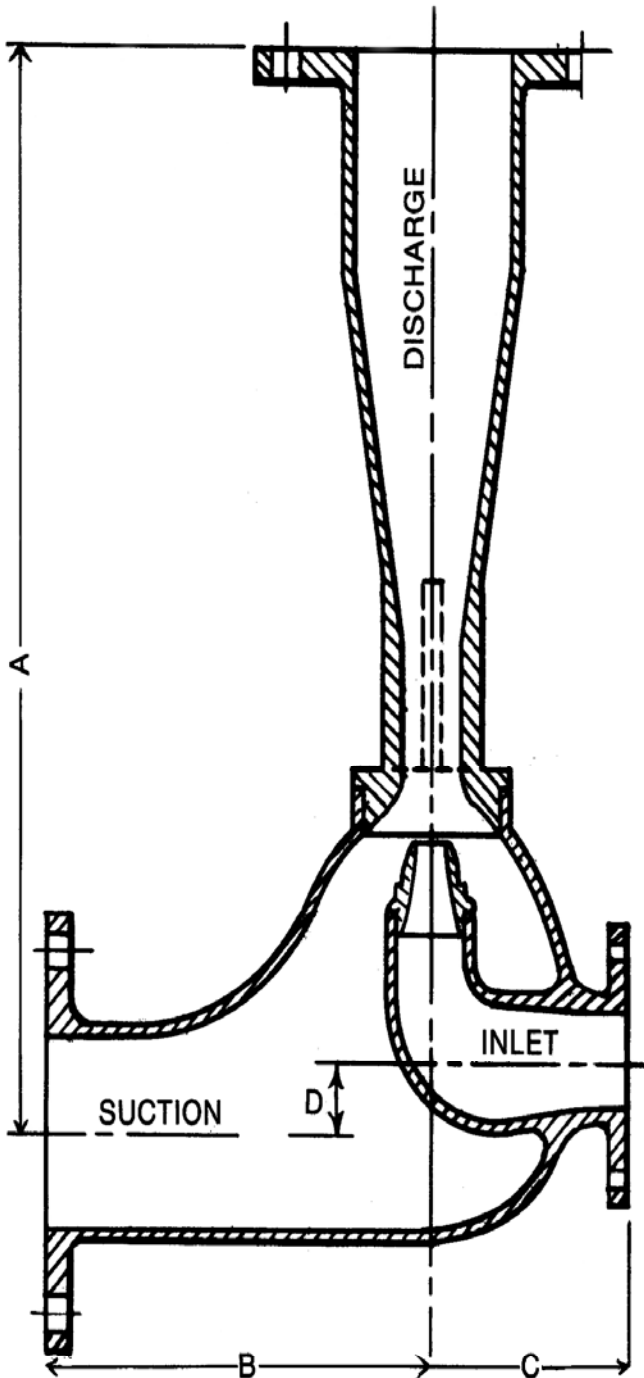

MODEL	Suction Discharge	INLET	A	B	C	D	WT. LBS.
1568-3"L	3"	2"	22"	8"	4"	1¼"	58

VITAFLOW, LLC
576 N. Birdneck Rd, Unit 142,
Virginia Beach, VA 23451,
Michael Hume, COO, Ph: 904/316-5774,
mhume@vitaflow.com

