

VITAFLOW 1568 - 3" EDUCTOR

Materials of Construction

Body & Diffuser Bronze ASTM B62
Nozzle Monel or 316 Stainless

SPECIFICATIONS

Suction Lift Up to - 20 Feet
Discharge Head Up to 90 Feet
Inlet Pressure up to 150 PSI
Inlet Quantity 100 - 120 GPM
Suction Capacity 150-250 GPM


Flanges

Standard Flanges 150 LB ANSI B16. 24 Flat Face
(also available with DIN or JIS flanges)

Suggested Uses

The V.M. 1568 flanged eductor can be permanently installed for pumping liquids from chain lockers, bilges, cargo spaces or any area that has to be pumped dry.

<u>Dimensions:</u>	<u>Inches</u>
Inlet	2"
Suction	3"
Discharge	3"
'A'	14 ³ / ₄ "
"B"	8"
"C"	4"
"D"	1 ¹ / ₄ "
Weight	45 Lbs

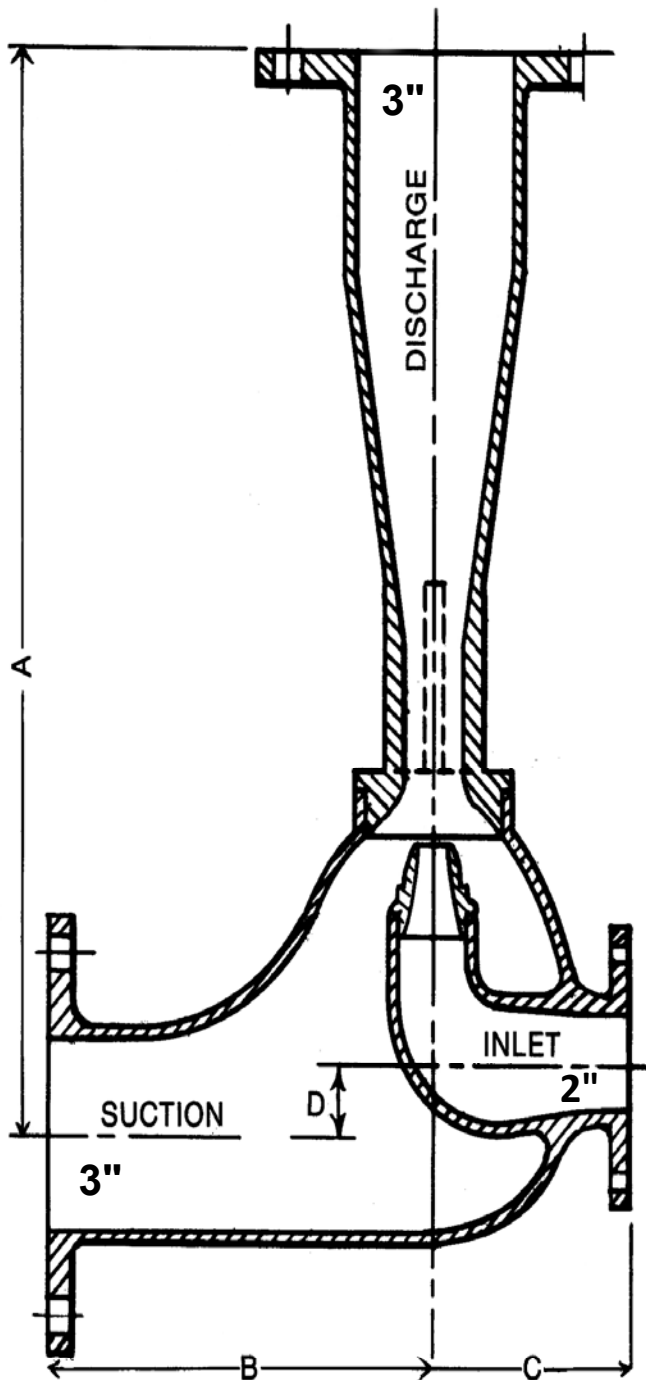

MODEL	<u>Suction</u> Discharge	<u>Inlet</u>	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>WT.</u> LBS.
1568-3"	3"	2"	14 ³ / ₄ "	8"	4"	1 ¹ / ₄ "	45

VITAFLOW, LLC
576 N. Birdneck Rd, Unit 142,
Virginia Beach, VA 23451,
Michael Hume, COO,
Ph: 904/316-5774,
mhume@vitaflow.com

