


VITAFLOW **1802 - 8"** **EDUCTOR**

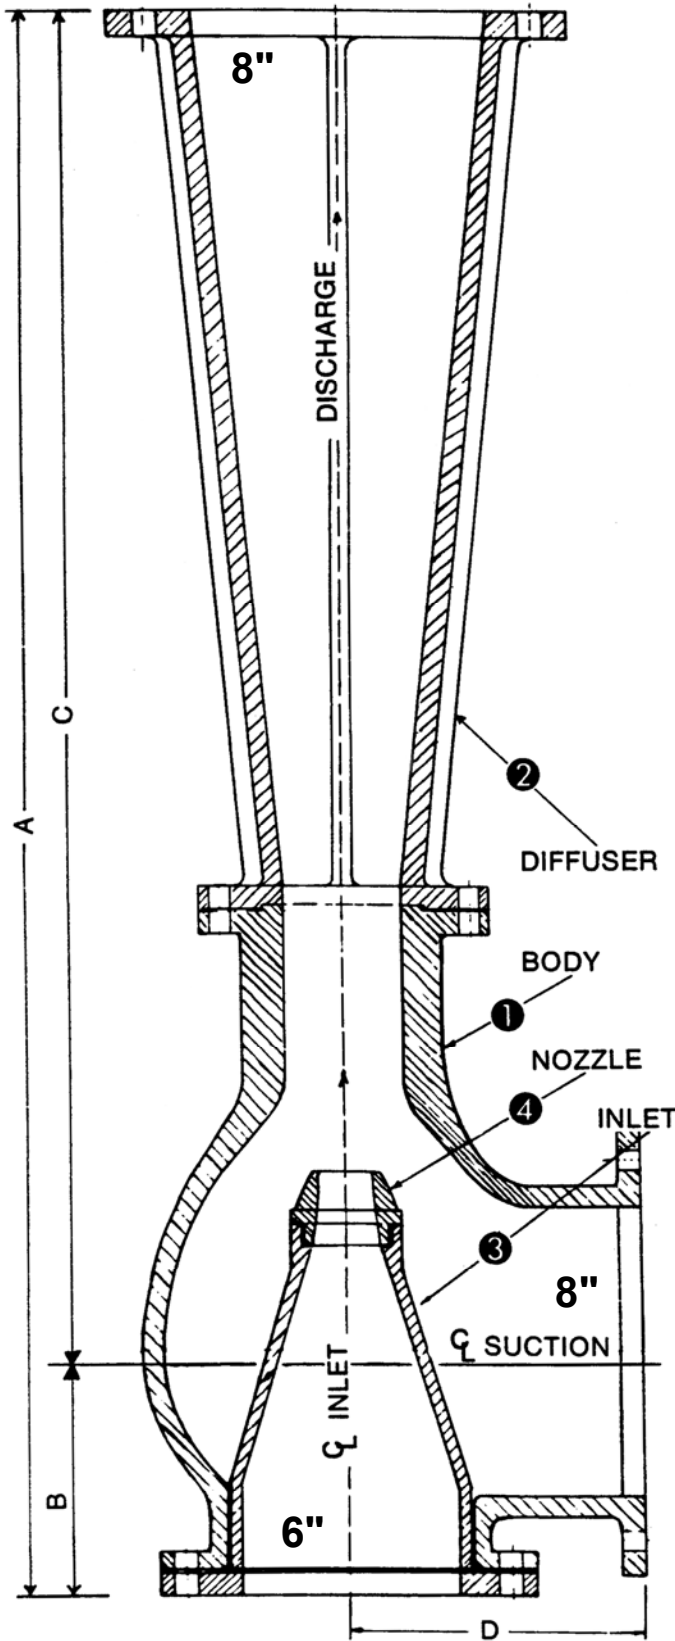

Materials of Construction:

Body & Diffuser -Bronze ASTM B62
Nozzle -Monel or Stainless steel

Connections:

All Flanges 150 lb. ANSI B16.24 Flat Face

General Operating Range

Suction Capacity	125-250 M3/H	(550-1100 GPM)
Inlet Pressure	6 -12 Bar	(50-150 PSI)
Inlet Quantity	125-204 M3/H	(550-900 GPM)
Suction Lift	Up to -6 Meters	(20 Feet)
Discharge Head	Up to 30 Meters	(100 Feet)

Dimensions

Inlet	6"	150
Suction	8"	200
Discharge	8"	200
"A"	42"	1067
"B"	7"	178
"C"	35"	889
"D"	8"	203
WEIGHT	285Lbs	130 Kg

Flange Dimensions: ANSI B16.24 150 LB Flat face

	<u>Inlet</u>	<u>Suction & Disch.</u>
<u>OD</u>	11"	13½"
<u>I.D.</u>	6"	8"
<u>Thick</u>	.812"	.937"
<u># Holes</u>	8	8
<u>BC</u>	9½"	11¼"
<u>Hole Ø</u>	.875"	.875"

VITAFLOW, LLC,
576 N. Birdneck Rd, Unit 142, Virginia Beach,
VA 23451, Michael Hume, COO,
Ph: 904/316-5774, mhume@vitaflow.com