

**925-N-3"L** VITAFLOW

## Bilgemate Multi-jet Nozzle

### Materials of Construction:

Body & Diffuser     Bronze ASTM B 62  
Nozzle                 Monel or 316 Stainless

### Flange Connections:

All flanges 150 lb. ANSI B16.24 Flat Face

### Dimensions:

Inlet	1½"
Suction	3"
Discharge	3"
"A"	21"
"B"	3¼"
"C"	17.75"
"D"	5"
Weight	75 lbs.


### General Specifications:

Suction Capacity	Up to 160 GPM
Suction Lift	Up to 20 Feet
Discharge Head	Up to 100 Ft.
Inlet Quantity	Up to 250 GPM
Inlet Pressure	Up to 150 PSI

**BILGEMATE** Peripheral –Jet nozzle eductor has a straight through suction path for non-clog flow of liquids mixed with solid materials and slurries.

### Note:

1. Throat size varies up to 1½" diameter
2. Available with threaded connections
3. Spare replacement nozzles available
4. Eductor is furnished to meet the Requirements of each application
5. Optional replaceable throat wear Sleeve lining in ceramic or stainless
6. Shock & Vibration Tested

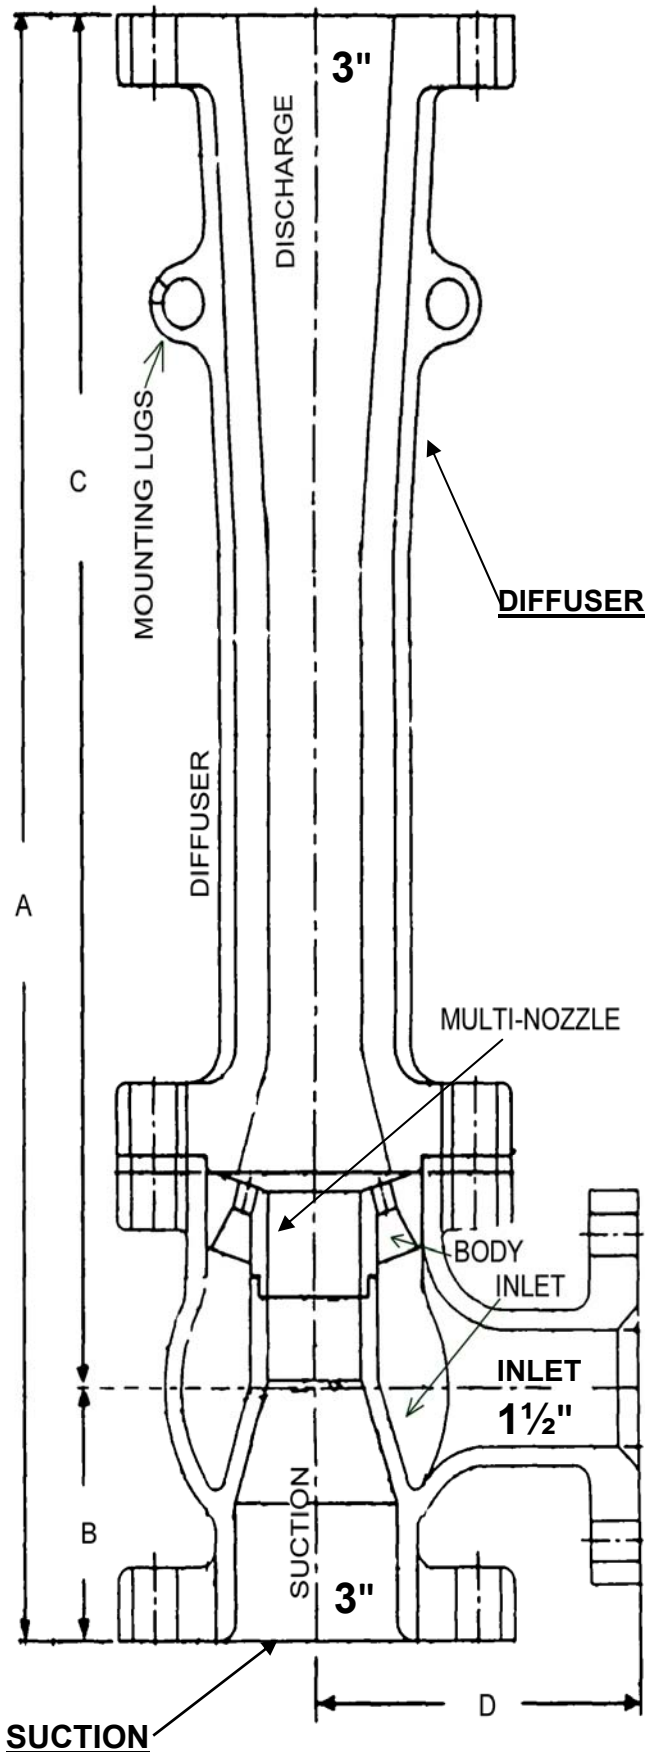

### V.F. 925N-3" L Bilgemate

[VITAFLOW, LLC,](#)  
[576 N. Birdneck Rd, Unit 142,](#)  
[Virginia Beach, VA 23451,](#)  
[Michael Hume, COO,](#)  
[Ph: 904/316-5774, mhume@vitaflow.com](mailto:mhume@vitaflow.com)